



75 pitch




112 pitch



150 pitch

DucoWall Screening 35

DucoWall Screening 35 is a louvre wall system that can be clicked directly onto the support section. This results in **quick and smooth assembly**. There are three different vertical spacing options (pitch). In this way, the louvre wall can be adapted to the requirements of any project.

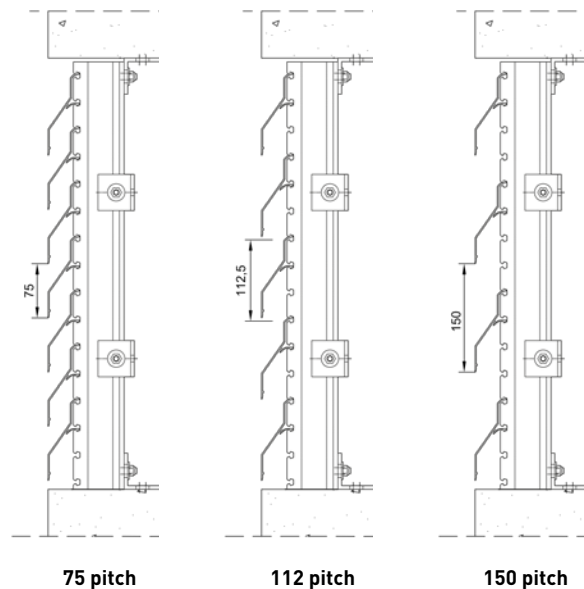

75 pitch

112 pitch

150 pitch

Dimensions and support sections

SUPPORT SECTION TYPE	40/21 (Double)	40/70 Double
Spacing of the louvre (pitch)	75 mm - 112 mm - 150 mm	
Louvre depth	43 mm	
Recess depth	57 mm	107 mm
Maximum span between 2 support sections	← 2000 mm →	

Ventilation values

LOUVRE PITCH (MM)	75	112	150	
Visual free area	52 %	68 %	76 %	
Physical free area	29 %	27 %	35 %	
Ce (higher is better)	0,13	0,12	0,20	
Cd (higher is better)	0,16	0,18	0,22	
K-FACTOR (lower is better)	INLET	61,04	68,30	24,03
	OUTLET	38,58	32,65	20,29

Water resistance

AIR VELOCITY	Class		
	75	112	150
0 m/s	A	B	C
0,5 m/s	B	B	C
1 m/s	B	C	D
1,5 m/s	D	D	D
2 m/s	D	D	D
2,5 m/s	D	D	D