

High Performance




Excellent water resistance



DucoWall Classic W 130HP

The DucoWall Classic W 130HP has been specially developed for **intensive ventilation**. The uniquely shaped 'High Performance' louvre blade with a low resistance factor provides a combination of **very good airflow** (high flow rates) together with **excellent water resistance (class A)**. DucoWall Classic W 130HP is a louvre wall system that can be fitted against an existing structure. Quick and easy assembly is possible because of the 'Turn-Click' system.

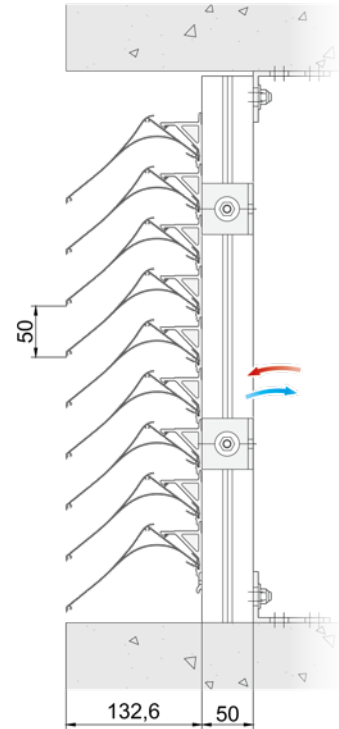

DIMENSIONS AND SUPPORT SECTIONS

Support section type	50/12	21/50 Multi	50/50	50/125
Spacing of the louvre (pitch)	50 mm			
Louvre depth	133 mm			
Recess depth	145 mm	183 mm	183 mm	258 mm
Maximum span between 2 support sections	← 2300 mm →			

VENTILATION VALUES

Visual free area	88 %	
Physical free area	70 %	
Ce (higher is better)	0,34	
Cd (higher is better)	0,27	
K-FACTOR (lower is better)	INLET	8,55
	OUTLET	13,42

WATER RESISTANCE

Air velocity	Class
0 m/s	A
0,5 m/s	A
1 m/s	A
1,5 m/s	A
2 m/s	A
2,5 m/s	A

INSECT SCREEN

The following stainless-steel mesh can be provided as an OPTION	
Stainless steel mesh 2.3 x 2.3 mm	
Stainless steel mesh 6 x 6 mm	