



Description

Low height rectangular attenuator.

Attenuation material is mineral wool.

Insulation has a surface protector which can be cleaned with a rotating nylon brush or vacuum cleaner.

SKS meets the requirements of tightness class C and pressure class 2 according to EN 1507:2006.


Tested according to ISO 7235 standard.

SKS is pressure equipped with joining profile type ME2.

For special materials and sizes, please contact Price sales.

The attenuator is also available with the following accessories/options: Melinex

Dimensions and sound data

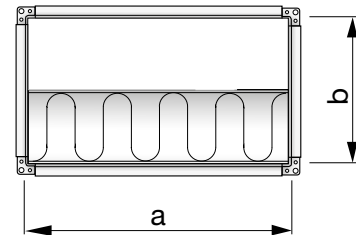

a [mm]	b [mm]	l [mm]	Insertion loss [dB] for centre frequency [Hz]							
			63	125	250	500	1k	2k	4k	8k
150-1000	150	650	3	7	15	19	20	17	16	14
150-1000	150	950	3	9	21	28	30	28	23	19
150-1000	150	1250	4	12	26	35	40	37	29	22
150-1000	200	650	4	6	11	13	15	14	12	12
150-1000	200	950	5	9	16	21	23	20	15	14
150-1000	200	1250	6	11	20	28	31	26	17	15
150-1000	250	650	5	8	10	13	12	11	10	9
150-1000	250	950	6	10	15	19	18	15	12	11
150-1000	250	1250	6	12	19	25	22	18	14	12
150-1000	300	650	4	8	11	15	12	13	11	10
150-1000	300	950	5	10	15	19	17	19	15	13
150-1000	300	1250	6	13	18	23	21	22	17	15
150-1000	350	650	4	7	7	11	10	9	8	7
150-1000	350	950	5	9	10	14	13	11	9	8
150-1000	350	1250	5	11	13	18	17	14	10	9
150-1000	400	650	2	4	6	9	14	12	8	8
150-1000	400	950	3	5	9	14	20	16	10	9
150-1000	400	1250	5	6	12	17	25	24	13	11


Order code

Product	PMAV	a	b	l	c	d
PMAV						
Width (a), in mm						
150 – 1000						
Height (b), in mm in step of 50 mm						
150 – 400						
Length (l), in mm						
650, 950, 1250						
Profile type (c)						
e.g. ME2 25, 30, 40						
Accessories (d)						
Melinex						

Example: SKS 600 - 200 - 950 - Melinex

Technical data

(b) Height 150 - 200 - 250 mm

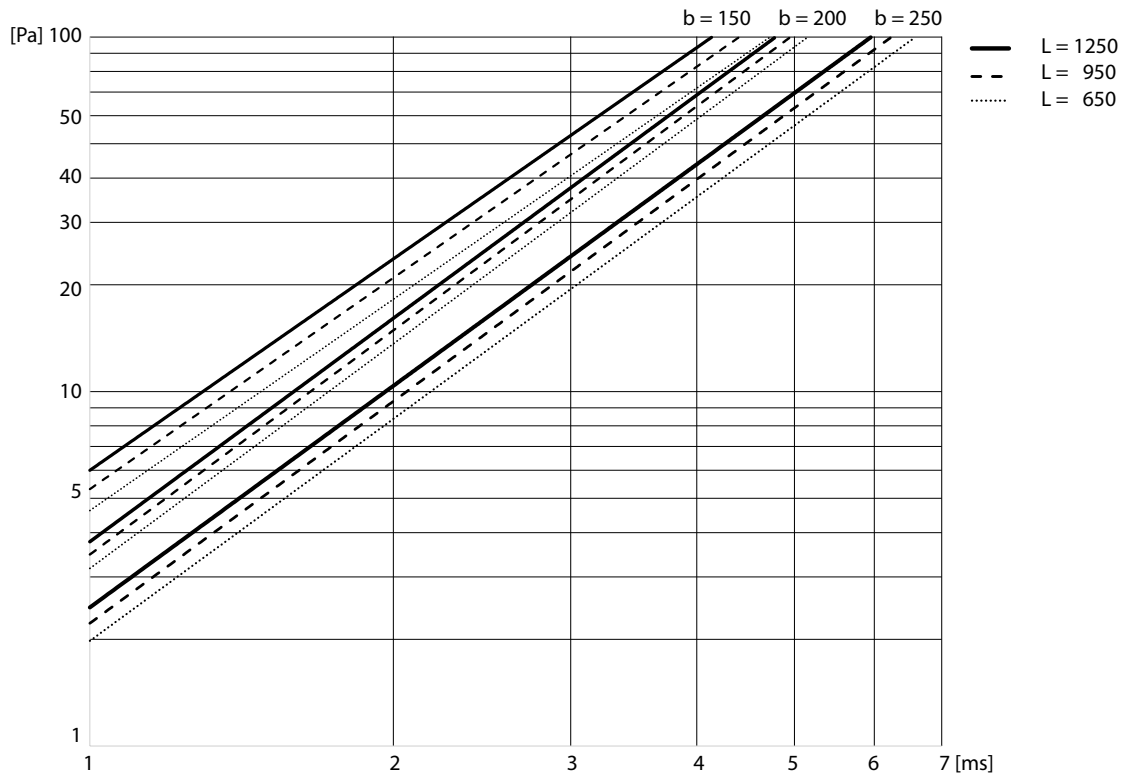

Technical data

(b) Height 300 - 350 - 400 mm

